

The Ecostrad Heaterstrip

PART NUMBER	RATED POWER	VOLTAGE	DIMENSIONS	CURRENT	WEIGHT	HEATED ZONE	
						Indoors	Outdoors
ES-HS-26	2600W	230V	140x 16 x 4.5cm	11.3A	6.9kg	9-16m ²	6-9m ²
ES-HSR-26 <small>(with Remote Control)</small>	2600W	230V	145 x 16 x 4.5cm	11.3A	7.4kg	9-16m ²	6-9m ²

FEATURES AND BENEFITS

The stylish and powerful 2.6kW the Ecostrad Heaterstrip is a high quality, electric, zero light and zero maintenance designer space heater providing a modern and tasteful solution for heating zones in large indoor spaces, and with an IP rating of IP65, also offers an ideal solution for heating sheltered outdoor spaces with low air movement.

The slimline Heaterstrip offers considerable flexibility when it comes to installation as it can be both ceiling and wall mounted, and is extremely simple to install. Wall/ceiling mount swivel brackets and accessories are provided with the heater and, for longer distances from the ceiling, an optional wire suspension kit is available on request.

Reliable, durable and long lasting, the Heaterstrip is available with or without a remote control. The remote control version comes with two different power levels and can be timer controlled for up to 9 hours.

Far Infrared heat produced by the Ecostrad Heaterstrip heats people directly, without heating the air in between, producing a warm, comfortable and gentle heat. The Kanthal AF heating element ensures a warm up time of less than 10 minutes, the perfect solution for keeping warm on those chilly evenings outdoors, or for warming up those hard to heat areas in larger indoor spaces such as shops, cafes, restaurants and bars. Silent in operation and with zero light, this is a discreet, efficient and environmentally friendly way to ensure clean, comfortable and effective warmth.



Heating Element: Kanthal AF

Emitter: Structured aluminium surface with Ge IR enhancing coating


Body: Extruded anodised aluminium

Remote Control: 2 power levels & 9 hour timer


Warm Up Time: <10 minutes

Useful Wavelength Range: 3-10 µm

IP Rating: IP65

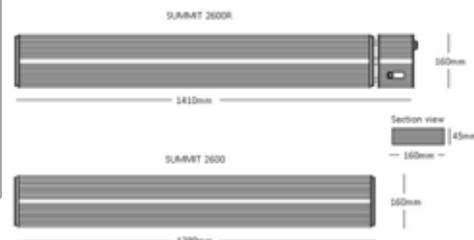

MOUNTING DIAGRAM

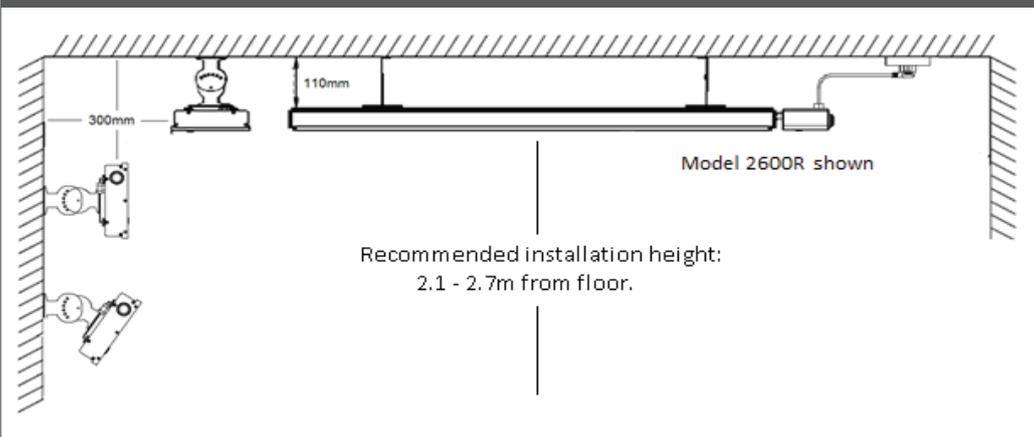

IMPORTANT

In exposed areas with air movement / wind the far infrared spread may reduce by 1/3 to 1/2. In such areas we would recommend proportionally increasing the number of Heaterstrip heaters and mounting at the lowest height.

The recommended installation height of the Heaterstrip is 2.1m to 2.7m (83"-106") from the floor. Under no circumstances is the heater to be installed at less than 1.8m (71") from the floor. In all cases it should be installed at a height where it cannot be touched in operation. The heated zones detailed are based on the recommended mounting heights. Please refer to the Ecostrad Heaterstrip Installation Manual before installation and for guidance on heated zones and heat intensity at alternative mounting heights.

Ensure supply voltage does not exceed 245 volts.

Warranty excludes remote control.

