


The Ecostrad Tuscany

| PART NUMBER | RATED POWER | VOLTAGE | DIMENSIONS | CURRENT | WEIGHT | HEATED ZONE | |
|-------------|-------------|---------|---------------------|---------|--------|----------------------|--------------------|
| | | | | | | Indoors | Outdoors |
| ES-HC-25 | 2500W | 230V | 87.9 x 19.5 x 8.5cm | 10.9A | 3kg | 10 -18m ² | 7-12m ² |
| ES-HCR-25 | 2500W | 230V | 87.9 x 19.5 x 8.5cm | 10.9A | 3kg | 10 -18m ² | 7-12m ² |

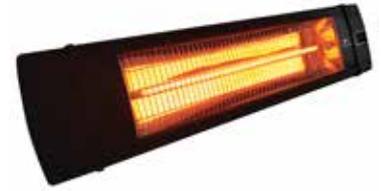

FEATURES AND BENEFITS Ecostrad Tuscany with its classic, tasteful and sleek design is a powerful, electric space heater made to the highest quality. Suitable in appearance for both domestic and commercial settings with its smart, black, aluminium powder coated finish, the Tuscany has an IP rating of IP55 so is ideal for heating both covered and uncovered outdoor areas that are relatively sheltered from airflow such as bar, restaurant and café terraces. It also provides an excellent solution for heating those large, hard to heat, draughty indoor spaces such as public halls, workshops and loading bays.

With a warm up time of just 5-10 seconds, the ultra-long life carbon heating lamp of the Tuscany, with a bulb life of up to 10,000 hours, quickly produces an effective feeling of comfortable warmth. Silent in operation, the Tuscany is available with, or without, a remote control; the remote control version provides 4 power settings (100%, 75%, 50%, 25%) and can be timer controlled for up to 9 hours. Ideal for those looking for a discreet and easy to control solution that provides an instant and powerful heat with a warm and comforting glow, but who do not want the glare and invasive light produced by most quartz halogen heaters available.

The Tuscany can be both wall and ceiling mounted (see mounting diagram) and is quick and simple to install. Alternatively, it can be fixed to a portable stand enabling it to become a freestanding heater, offering further flexibility as to its positioning (Tuscany incorporates anti-tilt device, mounting guidelines must still be adhered to).

Leading the way in stylish outdoor living, the Ecostrad Tuscany offers an efficient and environmentally friendly way to ensure quick, clean and effective warmth.

For larger detailed commercial projects we always recommend Ecostrad carry out a detailed desktop assessment.

Heating Element: Ultra long-life carbon heating lamp (up to 10,000 hours)

Reflector: Mirror aluminium (98% reflection preventing rearward heat loss)

Body: Extruded aluminium, powder coated


Warm Up Time: 5-10 seconds

Useful Wavelength Range: 2 - 5µm

IP Rating: IP55



MOUNTING DIAGRAM

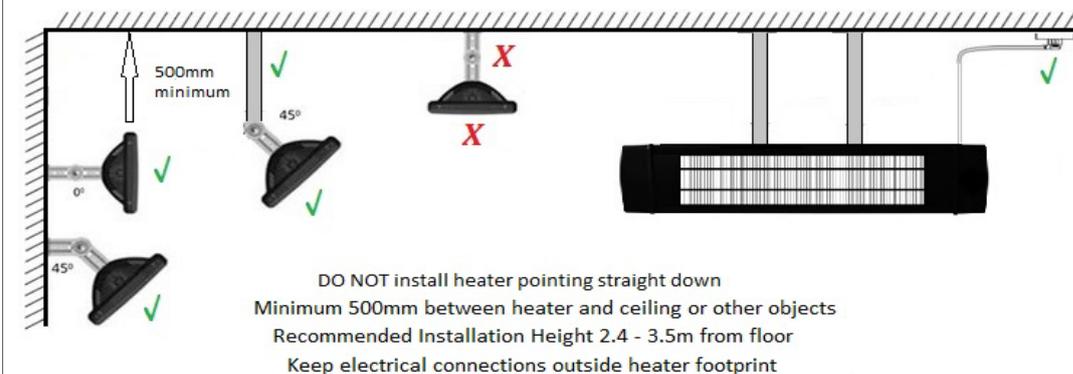

IMPORTANT

In exposed areas with air movement / wind the infrared spread may reduce by 1/3 to 1/2. In these areas we recommend mounting at the lowest height and proportionally increasing the number of heaters.

The recommended installation height of the Tuscany is 2.4m to 3.5m from the floor (95"-138"). Under no circumstances is the heater to be installed at less than 1.8m (71") from the floor. Unless mounted above 2.4m, do not use this heater with a programmer, timer or any other device that switches the heater on automatically. In all cases it should be installed at a height where it cannot be touched in operation.

The heated zones are based on recommended mounting heights. Please refer to the Ecostrad Tuscany Installation Manual before installation and for guidance on heated zones and heat intensity at alternative mounting heights.

Ensure supply voltage does not exceed 245 Volts. s. The Ecostrad Tuscany is guaranteed against failure due to faulty materials or workmanship for two years. The warranty excludes lamp and remote control. In the unlikely event of failure of the unit within this time, the unit must be returned to the supplier for repair or replacement. The guarantee is invalid if the correct installation instructions have not been adhered to.

